Coaxial Switch - S_TC16BKL Series
SP6T, TTL, 2.9 MM, Latching, 1 Set Indicators

REV. A

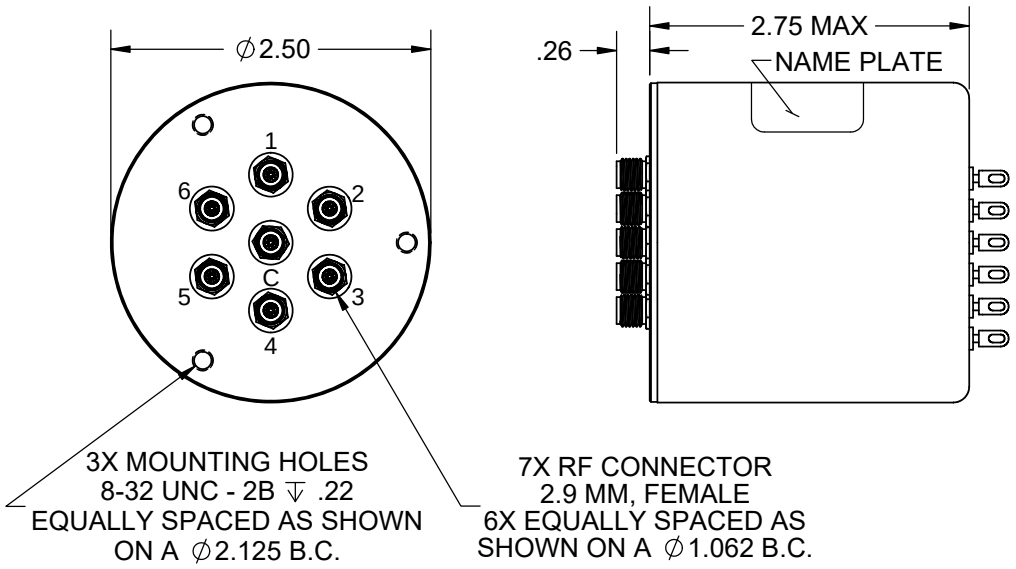

OPTION 1 - SOLDER TERMINALS



OPTION 4 - D-SUB

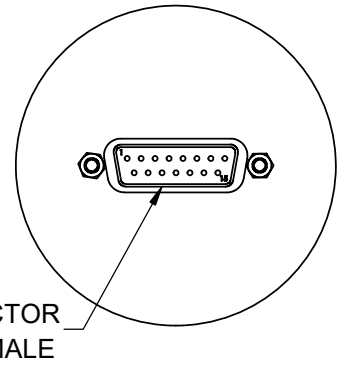

STANDARD - 1 SET INDICATORS

OPTION A - NO INDICATORS

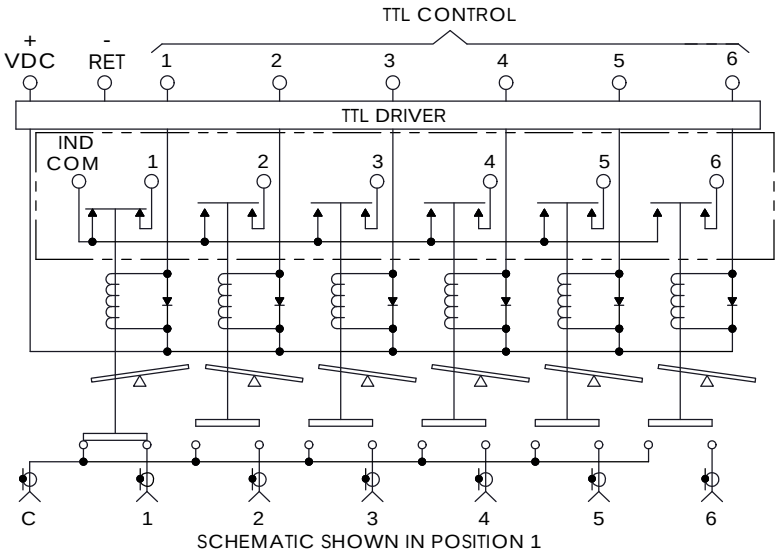

Frequency (GHz)	DC to 6	6 to 12	12 to 18	18 to 26.5	26.5 to 40
VSWR (max.)	1.3:1	1.4:1	1.5:1	1.7:1	2.0:1
Insertion Loss (max.)	0.2 dB	0.4 dB	0.5 dB	0.7 dB	0.9 dB
Isolation (min.)	70 dB	60 dB	60 dB	55 dB	50 dB
R.F. Power (max.)	100 WCW	70 WCW	45 WCW	25 WCW	10 WCW

RF Impedance: 50 ohms
Voltage: See Table
Current: See Table
TTL Logic:
Voltage High: 2.4 to 5.5 VDC
Current High: 5 mA max. @ 5 VDC
Switching Time: 20 mS max.

Material: Aluminum (RF Assy)
RF Contacts: Break Before Make
Finish: Iridite per MIL-DTL-5541, Type II Class 3
Cover Black

STYLE	ENVIRONMENT	OPERATING TEMPERATURE	NON-OPERATING TEMPERATURE	HUMIDITY
SO	SHELTERED	0 °C to +70 °C	-40 °C to +100 °C	0 to 95%
SW	OUTDOOR	-40 °C to +85 °C	-55 °C to +100 °C	0 to 100%
SA	AIRBORNE	-54 °C to +85 °C	-55 °C to +100 °C	0 to 100%

RoHS Compliant (except AIRBORNE)

OPTION	VOLTAGE	CURRENT @ 20º C
8	10 TO 14 VDC	500 mA Max @ 12 VDC
9	13 TO 18 VDC	350 mA Max @ 15 VDC
7	21 TO 28 VDC	225 mA Max @ 24 VDC
2	25 TO 32 VDC	240 mA Max @ 28 VDC

Model # ex. S[O]TC16BKL [2] [A] [1]

Style | Voltage | Indicators | Interface